

Mark Scheme (Final)

October 2020

Pearson Edexcel GCE In Physics (9PH0)

Paper 3: General and Practical Principles in

Physics

Edexcel and BTEC Qualifications

Edexcel and BTEC qualifications are awarded by Pearson, the UK's largest awarding body. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information visit our qualifications websites at www.btec.co.uk. Alternatively, you can get in touch with us using the details on our contact us page at www.edexcel.com/contactus.

Pearson: helping people progress, everywhere

Pearson aspires to be the world's leading learning company. Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at: www.pearson.com/uk

Autumn 2020
Publications Code 9PH0_03_2010_MS
All the material in this publication is copyright
© Pearson Education Ltd 2020

General Marking Guidance

- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded. Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- When examiners are in doubt regarding the application of the mark scheme to a candidate's response, the team leader must be consulted.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

Mark scheme notes

Underlying principle

The mark scheme will clearly indicate the concept that is being rewarded, backed up by examples. It is not a set of model answers.

1. Mark scheme format

- 1.1 You will not see 'wtte' (words to that effect). Alternative correct wording should be credited in every answer unless the MS has specified specific words that must be present. Such words will be indicated by underlining e.g. 'resonance'
- 1.2 Bold lower case will be used for emphasis e.g. 'and' when two pieces of information are needed for 1 mark.
- 1.3 Round brackets () indicate words that are not essential e.g. "(hence) distance is increased".
- 1.4 Square brackets [] indicate advice to examiners or examples e.g. [Do not accept gravity] [ecf].

2. Unit error penalties

- 2.1 A separate mark is not usually given for a unit but a missing or incorrect unit will normally mean that the final calculation mark will not be awarded.
- 2.2 This does not apply in 'show that' questions or in any other question where the units to be used have been given, for example in a spreadsheet.
- 2.3 The mark will not be awarded for the same missing or incorrect unit only once within one clip in epen.
- 2.4 Occasionally, it may be decided not to insist on a unit e.g the candidate may be calculating the gradient of a graph, resulting in a unit that is not one that should be known and is complex.
- 2.5 The mark scheme will indicate if no unit error is to be applied by means of [no ue].

3. Significant figures

- 3.1 Use of too many significant figures in the theory questions will not be prevent a mark being awarded if the answer given rounds to the answer in the MS.
- 3.2 Too few significant figures will mean that the final mark cannot be awarded in 'show that' questions where one more significant figure than the value in the question is needed for the candidate to demonstrate the validity of the given answer.
- 3.3 The use of one significant figure might be inappropriate in the context of the question e.g. reading a value off a graph. If this is the case, there will be a clear indication in the MS.
- 3.4 The use of $g = 10 \text{ m s}^{-2}$ or 10 N kg⁻¹ instead of 9.81 m s⁻² or 9.81 N kg⁻¹ will mean that one mark will not be awarded. (but not more than once per clip). Accept 9.8 m s⁻² or 9.8 N kg⁻¹
- 3.5 In questions assessing practical skills, a specific number of significant figures will be required e.g. determining a constant from the

gradient of a graph or in uncertainty calculations. The MS will clearly identify the number of significant figures required.

4. Calculations

- 4.1 Bald (i.e. no working shown) correct answers score full marks unless in a 'show that' question.
- 4.2 If a 'show that' question is worth 2 marks. then both marks will be available for a reverse working; if it is worth 3 marks then only 2 will be available.
- 4.3 **use** of the formula means that the candidate demonstrates substitution of physically correct values, although there may be conversion errors e.g. power of 10 error.
- 4.4 **recall** of the correct formula will be awarded when the formula is seen or implied by substitution.
- 4.5 The mark scheme will show a correctly worked answer for illustration only.

5. Quality of Written Communication

- 5.1 Indicated by QoWC in mark scheme. QWC Work must be clear and organised in a logical manner using technical wording where appropriate.
- 5.2 Usually it is part of a max mark, the final mark not being awarded unless the OoWC condition has been satisfied.

6. Graphs

- 6.1 A mark given for axes requires both axes to be labelled with quantities and units, and drawn the correct way round.
- 6.2 Sometimes a separate mark will be given for units or for each axis if the units are complex. This will be indicated on the mark scheme.
- 6.3 A mark given for choosing a scale requires that the chosen scale allows all points to be plotted, spreads plotted points over more than half of each axis and is not an awkward scale e.g. multiples of 3, 7 etc.
- 6.4 Points should be plotted to within 1 mm.
- Check the two points furthest from the best line. If both OK award mark.
- If either is 2 mm out do not award mark.
- If both are 1 mm out do not award mark.
- If either is 1 mm out then check another two and award mark if both of these OK, otherwise no mark.

For a line mark there must be a thin continuous line which is the best fit line for the candidate's resuts

Question Number	Acceptable Answer		Additional Guidance	Mark
1	 An explanation that makes reference to the following points: High precision means a small spread of values High accuracy means close to the true value Any TWO from: A is precise but not accurate (as there is a small spread but displaced from the centre of the target) B is both accurate and precise (as there is a small 	(1) (1) (1) (1)	Credit MP1/MP2 if the explanation of high accuracy/precision is made by reference to a relevant part of the diagram.	
	 C is neither accurate nor precise (as there is a large spread displaced from the centre of the target) D is accurate but not precise (as there is a moderate spread centred on the target) 	(1)(1)		4

(Total for Question 1 = 4 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
2(a)(i)	An explanation that makes reference to the following points:			
	Identify when the distance fallen between frames has become constant	(1)		
	Measure the distance fallen over a number of frames Or measure the distance fallen between frames a number of times and calculate an average distance	(1)		
	Calculate terminal velocity by dividing the distance fallen by the time taken	(1)	MP3: Allow reference to $v = \frac{s}{t}$ to calculate terminal velocity	
	• Use $\frac{1}{60}$ s as time between frames.	(1)		4
2(a)(ii)	An explanation that makes reference to the following points:			
	There may be parallax error in reading the ball position	(1)		
	Or the metre rule may not be vertical			
	 Recorded distance may be greater than actual distance, so calculated terminal velocity would be greater than true value. 	(1)	Recorded distance may be less than actual distance, so terminal velocity would be less than true value	
	OR	(1)		
	• The frame rate may be not be 60 s^{-1}			
	• Time between frames may be less than 1/60 s, so calculated terminal velocity may be greater than true value	(1)	Time between frames may be more than 1/60 s, so calculated terminal velocity may be less than true value	2

2(b)	 An explanation that makes reference to the following points: With a phone camera there won't be reaction time errors (when starting and stopping the stopwatch) Or with a phone camera the recording can be replayed (a)			
(when starting and stopping the stopwatch) Or with a phone camera the recording can be replayed (a				
number of times)So the uncertainty in the measu	ared times will be reduced	(1)		
Or this may lead to a more	accurate value/time/velocity	(1)	2	

(Total for Question 2 = 8 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
3(a)	Any TWO from:			
	Should have used (a fiducial mark as) a reference point	(1)		
	 Should have timed from the equilibrium position of the bob Or Shouldn't time from the maximum displaced 		Accept centre/vertical/undisplaced position for equilibrium position	
	position of the bob	(1)		
	 Only timed one oscillation Or should have times more than one oscillation 	(1)		
	 Should have allowed the pendulum to swing to and fro a few times before starting to time (as the 	(1)		
	first swing may be different from the others)	(1)		2
3(b)	Determination of gradient	(1)	$T^2 = \frac{4\pi^2}{r}l$	
	• Re-arrangement of $T = 2\pi \sqrt{\frac{l}{g}}$	(1)	$T^{2} = \frac{4\pi^{2}}{g}l$ $T^{2} = \frac{4\pi^{2}}{g}(h-d)$ $T^{2} = -\frac{4\pi^{2}}{g}d + \frac{4\pi^{2}}{g}h$	
	• Algebra to show $T^2 = -\frac{4\pi^2}{g}d + \frac{4\pi^2}{g}h$	(1)	$T^2 = -\frac{4\pi^2}{g}d + \frac{4\pi^2}{g}h$	
	• Gradient = $(-)\frac{4\pi^2}{g}$	(1)	Example of calculation	
	• $g = 9.6 \text{ m s}^{-2} [\text{accept } 9.5 \rightarrow 9.7 \text{ m s}^{-2}]$	(1)	gradient = $\frac{(12.1 - 9.2) \text{ s}^2}{(0.00 - 0.70) \text{ m}} = -4.1 \text{ s}^2 \text{m}^{-1}$ $\therefore g = \frac{4\pi^2}{4.1 \text{ s}^2 \text{m}^{-1}} = 9.6 \text{ m s}^{-2}$	5
			$\therefore g = \frac{4\pi^2}{4.1 \mathrm{s}^2 \mathrm{m}^{-1}} = 9.6 \mathrm{m} \mathrm{s}^{-2}$	
			(Total for Overtion 2 – 7 n	

(Total for Question 3 = 7 marks)

Question Number		A	acceptable Answer		Additional Guidance	Marl
*4	IC points	IC mark	Max linkage mark	Max final mark	This question assesses a student's ability to show a coherent and logically structured answer with linkages and fully sustained reasoning.	
	6	4	2	6	Marks are awarded for indicative content and for how the answer is	
	5	3	2	5	structured and shows lines of reasoning.	
	4	3	1	4	The table shows how the marks should be awarded for indicative content and structure and lines of reasoning.	
	3	2	1	3	Number of marks	
	2	2	0	2	Number of indicative marks awarded sustained sustained	
	1	1	0	1	marking for indicative line of reasoning Answer shows a coherent and	
	0	0	0	0	answer logical structure with linkages and fully sustained lines of reasoning demonstrated	
	Indicative c	ontent:			5-4 3 throughout 3-2 2 Answer is partially structured with some linkages and lines of reasoning	
	IC1		lecay depends upon the sample $(A = -\lambda N)$	number of unstable	O O Answer has no linkages between points and is unstructured	
	IC2		a large half-life, so unst e sample for a long time		IC2: accept idea that it takes a long time to decay for "unstable nuclei are presentor a long period of time"	
	IC3	When a nucl mass Δm	eus decays there is a (si	mall) decrease in	IC3 accept a reference to binding energy increasing	
	IC4	Energy is rel	leased according to ΔE	$=c^2\Delta m$		
	IC5	Δm is small energy is rel	but c is large, so a signification eased	ificant amount of		
	IC6	the atoms in	sed by the decay become the sample (hence sample) of the surroundings			
					(Total for Question 4 = 6 mag	arka)

(Total for Question 4 = 6 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
5(a)	• use of $Q = It$ • use of $V = \frac{w}{Q}$ • $W = 5.1 \times 10^8 \text{ J}$	(1) (1) (1)	Allow calculations based on power i.e. $VI = \frac{W}{t}$ Example of calculation: $Q = It = 25 \times 10^{3} \text{A} \times 7.5 \times 10^{-3} \text{s} = 188 \text{ C}$ $W = QV = 188 \text{ C} \times 2.7 \times 10^{6} \text{V} = 5.08 \times 10^{8} \text{ J}$	3
5(b)	 Use of A = πd²/4 Or use of πr² Use of R = ρl/A Calculates l - 1.5 Height = 27.1 m so it is not taller than 30 m OR Use of A = πd²/4 Or use of πr² Calculate wire length wire for 30 m statue [l = 31.5 m] Use of R = ρl/A R = 4.7 × 10⁻³ Ω (> 4.3 × 10⁻³ Ω) so statue is not taller than 30 m 	(1) (1) (1) (1)	Example of calculation: $A = \frac{\pi d^2}{4} = \frac{\pi \times (1.2 \times 10^{-2} \text{m})^2}{4} = 1.13 \times 10^{-4} \text{m}^2$ $l = \frac{RA}{\rho} = \frac{4.3 \times 10^{-3} \Omega \times 1.13 \times 10^{-4} \text{m}^2}{1.7 \times 10^{-8} \Omega \text{ m}}$ $= 28.6 \text{ m}$ Height = 28.6 m = 27.1 m	4
5(c)	So that the lightning makes contact with the conductor rather than the statue	(1)	(Tatal for Ornation 5 0	1

(Total for Question 5 = 8 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
6(a)	Series circuit with power supply, heater and ammeter.Voltmeter connected in parallel with heater	(1) (1)		2
6(b)	 Use of P = VI Calculation of gradient Gradient = Δm/Δt Use of ΔE = mL and P = ΔE/Δt L = 2.30 × 10⁶ (J kg⁻¹) Comparison of calculated value for L with values in table and appropriate conclusion. But not all of the energy supplied to the liquid will be used to boil the liquid Or thermal energy will be transferred to surroundings 	(1) (1) (1) (1) (1)	For MP2 and MP3 credit Δm read from graph and used with corresponding Δt value For MP3 and MP4, credit $L = \frac{VI}{\text{gradient}}$ Answers in the range $(2.26 - 2.34) \times 10^6 \text{ J kg}^{-1}$ Example of calculation: $\text{grad} = \frac{(211 - 155) \times 10^{-3} \text{ kg}}{(0 - 600) \text{ s}} = 9.33 \times 10^{-5} \text{ kg s}^{-1}$ $\therefore \frac{\Delta m}{\Delta t} = 9.33 \times 10^{-5} \text{ kg s}^{-1}$ $P = 20.5 \text{ V} \times 10.5 \text{ A} = 215 \text{ W}$ $\therefore L = \frac{215 \text{ W}}{9.33 \times 10^{-5} \text{ kg s}^{-1}} = 2.30 \times 10^6 \text{ J kg}^{-1}$	7

6(c)	 Use lagging to insulate the container from the surroundings So that a greater proportion of the energy supplied is used to boil the liquid Or 	(1) (1)	Accept "to minimise heat loss to the surroundings"	
	 Use a heater with a higher electrical power So that a shorter time is needed to boil the liquid 	(1) (1)		2

(Total for Question 6 = 11 marks)

Acceptable Answer		Additional Guidance	Mark
 An explanation that makes reference to the following points: The potential difference creates an electric field An (electric) field/force does work on the electrons (increasing their kinetic energy) 	(1)		
Or an (electric) field/force accelerates the electrons (increasing their velocity)	(1)		2
 (Perpendicularly) out of the page The force is perpendicular to the magnetic field and the direction of (conventional) current Or an application of Fleming's Left-Hand Rule 	(1)	Accept movement of electrons for current	2
An explanation that makes reference to the following points: • There would be a force (of constant magnitude) on the electron perpendicular to its direction of motion • Causing an acceleration towards the centre of a circle	(1) (1)	Accept reference to centripetal force for MP1	2
 Use of F = BQv and F = EQ Algebra to show v = E/B 	(1) (1)		2
• Use of $W = QV$ and $E_k = \frac{1}{2}mv^2$ • Use of $v = \frac{E}{B}$ • $\frac{e}{m} = 1.7 \times 10^{11} \text{C kg}^{-1}$	(1) (1) (1)	Example of calculation: $v = \frac{E}{B} = \frac{1.4 \times 10^{4} \text{ V m}^{-1}}{1.5 \times 10^{-3} \text{ T}} \qquad \frac{e}{m} = \frac{v^{2}}{2V}$ $e = \frac{\left(9.33 \times 10^{6} \text{ m s}^{-12}\right)}{1.5 \times 10^{-1} \text{ m}} = 1.74 \times 10^{11} \text{ C kg}^{-1}$	3
	 An explanation that makes reference to the following points: The potential difference creates an electric field An (electric) field/force does work on the electrons (increasing their kinetic energy) Or an (electric) field/force accelerates the electrons (increasing their velocity) (Perpendicularly) out of the page The force is perpendicular to the magnetic field and the direction of (conventional) current Or an application of Fleming's Left-Hand Rule An explanation that makes reference to the following points: There would be a force (of constant magnitude) on the electron perpendicular to its direction of motion Causing an acceleration towards the centre of a circle Use of F = BQv and F = EQ Algebra to show v = E/B 	An explanation that makes reference to the following points: • The potential difference creates an electric field • An (electric) field/force does work on the electrons (increasing their kinetic energy) Or an (electric) field/force accelerates the electrons (increasing their velocity) • (Perpendicularly) out of the page • The force is perpendicular to the magnetic field and the direction of (conventional) current Or an application of Fleming's Left-Hand Rule An explanation that makes reference to the following points: • There would be a force (of constant magnitude) on the electron perpendicular to its direction of motion • Causing an acceleration towards the centre of a circle • Use of $F = BQv$ and $F = EQ$ • Algebra to show $v = \frac{E}{B}$ (1) • Use of $W = QV$ and $E_k = \frac{1}{2}mv^2$	An explanation that makes reference to the following points: • The potential difference creates an electric field • An (electric) field/force does work on the electrons (increasing their kinetic energy) Or an (electric) field/force accelerates the electrons (increasing their velocity) • (Perpendicularly) out of the page • The force is perpendicular to the magnetic field and the direction of (conventional) current Or an application of Fleming's Left-Hand Rule Accept movement of electrons for current Or an application of Fleming's Left-Hand Rule (1) An explanation that makes reference to the following points: • There would be a force (of constant magnitude) on the electron perpendicular to its direction of motion • Causing an acceleration towards the centre of a circle • Use of $F = BQv$ and $F = EQ$ • Algebra to show $v = \frac{E}{B}$ (1) • Use of $W = QV$ and $E_k = \frac{1}{2}mv^2$ (1) Example of calculation:


7(d)	The hydrogen ion must be (about 2000 times) more massive than the electron Or the electron must be (about 2000 times) less	Accept "proton" for "hydrogen ion"	
	massive than the hydrogen ion (1)		1

(Total for Question 7 = 12 marks)

Question Number	Acceptable Answer		Additional Guidance	
8(a) 8(b)(i)	 An explanation that makes reference to the following points: Shows expansion ln Δθ = ln Δθ₀ - bt Compares with y = mx + c and states that the gradient is b (which is constant) In values correct (at least 2 dec.places) Labels and unit Scales Plots Line of best fit 	(1) (1) (1) (1) (1) (1)	$\begin{array}{ c c c c c }\hline \Delta\theta /^{\circ}C & \ln{(\Delta\theta /^{\circ}C)} \\ \hline 72 & 4.277 \\ \hline 64 & 4.159 \\ \hline 58 & 4.060 \\ \hline 53 & 3.970 \\ \hline 48 & 3.871 \\ \hline \end{array}$	5
8(b)(ii)	 Determines gradient using large triangle b = 8 × 10⁻⁴ → 9 × 10⁻⁴ (2 or 3 sf) Units s⁻¹ 	(1) (1) (1)	Example of calculation: $m = \frac{4.27 - 3.85}{(0 - 500) \text{ s}} = 8.4 \times 10^{-4} \text{ s}^{-1}$	3

8(c)	MAX 3 from		
	 Dataloggers are useful when data changes over a very 		
	short (or very long) time scale	(1)	
	 Dataloggers are useful when a number of quantities are being measured simultaneously 	(1)	
	• A comment on the time between temperature readings in this experiment.	(1)	
	 It takes longer for the liquid in glass thermometer to respond to temperature changes than the temperature sensor 	(1)	
	• There may be parallax error in reading from the liquid in glass thermometer	(1)	
	 Conclusion consistent with discussion of suitability of using a data logger 	(1)	4

(Total for Question 8 = 14 marks

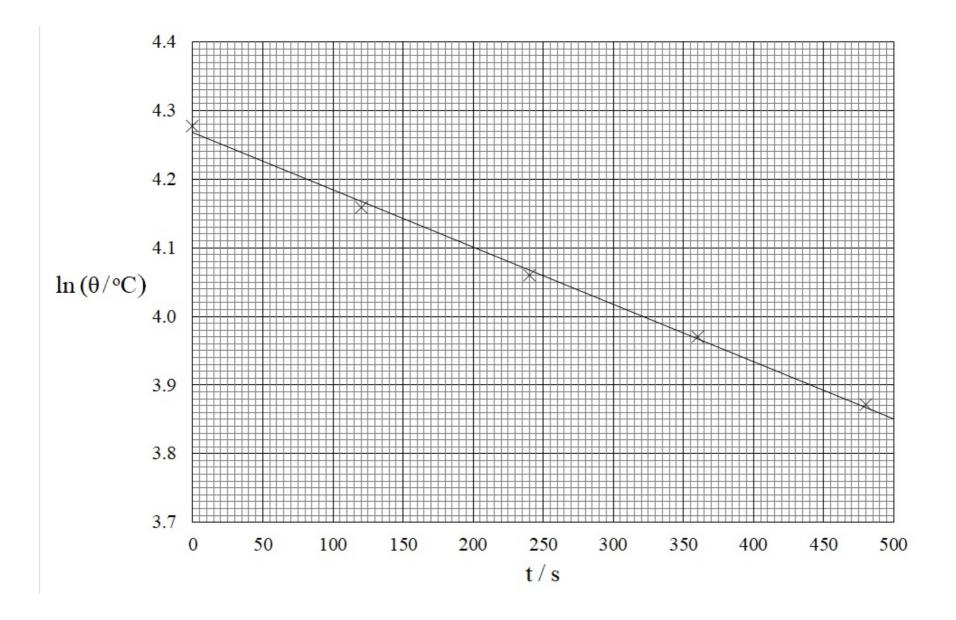

estion imber			Acceptable Answ	ver	Additional Guidance	Mar	
9(a)	IC points	IC mark	Max linkage mark	Max final mark	This question assesses a student's ability to show a coherent and logi structured answer with linkages and fully sustained reasoning.		
	6	4	2	6	Marks are awarded for indicative content and for how the answer is	Number of narks warded for tructure of naswarded so tructure of naswer and ustained ine of	
	5	3	2	5	structured and shows lines of reasoning.		
	4	3	1	4	The table shows how the marks should be awarded for indicative contand structure and lines of reasoning.		
	3	2	1	3			
	2	2	0	2	indicative marks awarded structure of answer and answer and		
	1	1	0	1	points seen in marking points line of reasoning		
	0	0	0	0	answer logical structure with linkages and fully sustained lines of reasoning demonstrated		
	Indicative of	ontent:			5-4 3		
			l. causes an alternatin	g current in the coil	unstructured		
	IC2 C		ng conductor in a mag		Alternative to first 3 indicative content points: IC1 Current in coil causes a magnetic field IC2 Current is alternating so field changes		
			nating, so force change	ges direction with	direction with current (same frequency)		
	0	arrent (same to the alternatequency of the	ing current drives the	cone at the	IC3 Field interacts with permanent magnet's field so coil experiences oscillating force		
		•	er forces the box into	oscillation			
	IC5 (At certain frequencies) the frequency of oscillation equals the natural frequency of oscillation of the air in the box						
	IC6 M	laximum ene	rgy is transferred and e box increases	the amplitude of	IC6 Resonance occurs and the amplitude of vibration of the box increases	6	

9(b)(i)	 A standing wave is set up in the tube Or interference (of sound waves) takes place in the tube 	(1)		
	 Where constructive interference occurs the amplitude is a maximum Or at antinodes the amplitude is a maximum 	(1)		
	 Where destructive interference occurs the amplitude is a minimum Or at nodes the amplitude is zero/minimum 	(1)		
	 Sand is displaced from points of max amplitude to points of min amplitude Or sand is displaced from antinodes to nodes 	(1)		4
9(b)(ii)	 Measure over at least 3 heaps Divide by the number of gaps between the heaps Repeat measurement and calculate average 	(1) (1) (1)	i.e at least 2 gaps	3
9(b)(iii)	 Use of d = λ/2 Use of v = fλ v = 330 (m s⁻¹) and a comment on consistency with 340 m s⁻¹ 	(1) (1) (1)	Example of calculation: $\lambda = 2d = 2 \times 5.1 \times 10^{-2} \text{ m} = 0.102 \text{ m}$ $v = 3.25 \times 10^3 \text{ Hz} \times 0.102 \text{ m} = 332 \text{ m s}^{-1}$	3

(Total for Question 9 = 16 marks)

Question Number	Acceptable Answer		Additional Guidance Whole question to be clipped together to allow full ECF	Mark
10(a)(i)	 Calculation of mean value Use of l = πw l= 48.1 mm (3 sf) 	(1) (1) (1)	Example of calculation: $w = \frac{(15.3+15.2+15.4+15.3)}{4} = 15.3 \text{ mm}$ $l = \pi \times 15.3 \text{ mm} = 48.1 \text{ mm}$	3
10(a)(ii)	 Calculation of half range Or greatest deviation from mean % uncertainty = 0.7 % 	(1)	Example of calculation: Half range value = $\frac{15.4 \text{ mm} \cdot 15.2 \text{ mm}}{2} = 0.1 \text{ mm}$ $\therefore \% \text{ uncertainty} = \frac{0.1 \text{ mm}}{15.3 \text{ mm}} \times 100 \% = 0.65 \%$	2
10(a)(iii)	Allow ECF from (a)(i) Use of L = Nl with N = 16 or 18 L = 866 mm [0.866 m] Allow ECF from (a)(i)	(1) (1)	Example of calculation: $L = 18 \times 48.1 \text{ mm} = 866 \text{ mm}$	2
10(b)(i)	 Micrometer (screw gauge) Or <u>digital</u> calipers Because the measured value indicates a resolution of 0.01 mm 	(1) (1)		2
10(b)(ii)	• % uncertainty = 0.2 %	(1)	Example of calculation: $\% \text{ uncertainty} = \frac{0.005 \text{ mm}}{2.52 \text{ mm}} \times 100 \% = 0.20 \%$	1
10(b)(iii)	• % uncertainty = 1.6 %	(1)	Example of calculation: % uncertainty= $\frac{0.5 \text{ g}}{32.0 \text{ g}} \times 100 \% = 1.56 \%$	1
10(b)(iv)	 % uncertainty = 2.7 % [1 or 2 sf] Allow ECF from (a)(ii), (bii) and (b)(iii) 	(1)	Example of calculation: $\%$ uncertainty = 0.7 % + 1.6 % + (2 × 0.2 %) = 2.7 %	1

10(b)(v)	• Use of $V = L \times \frac{\pi d^2}{4}$	(1)	Example of calculation:	
	• Use of $\rho = \frac{m}{V}$	(1)	$V = 0.866 \text{ m} \times \frac{\pi (2.52 \times 10^{-3})^2}{4} = 4.32 \times 10^{-6} \text{ m}^3$	
	• Uncertainty in density = 200 kg m ⁻³	(1)	$\rho = \frac{3.20 \times 10^{-2} \text{ kg}}{4.32 \times 10^{-6} \text{m}^3} = 7400 \text{ kg m}^{-3}$	
	• So maximum density is 7600 kg m ⁻³ which is lower than the standard value		Uncertainty in $\rho = \pm (7400 \text{ kg m}^{-3} \times \frac{2.7}{100}) = 200 \text{ kg m}^{-3}$	
	Or comment consistent with their calculated value Allow ECF from (a)(iii) and (b)(iv)	(1)		4

(Total for Question 10 = 16 marks)

Question Number	Acceptable Answer		Additional Guidance	Mark
11(a)	 Use of L = 4πr²σT⁴ Use of I = L/(4πd²) I = 1.37 (kW m⁻²) This is less than 2 (kW m⁻²) and so the claim is false. 	(1) (1) (1) (1)	Example of calculation: $L=4\pi (6.96\times 10^8 \text{ m})^2 \times 5.67\times 10^{-8} \text{ W m}^{-2} \text{ K}^{-4} (5790 \text{ K})^4$ $L=3.88\times 10^{26} \text{ W}$ $I=\frac{3.88\times 10^{26} \text{ W}}{4\pi (1.50\times 10^{11} \text{ m})^2}=1372 \text{ W m}^{-2}$	4
11(b)(i)	 An explanation that makes reference to the following points: Radiation is absorbed/scattered passing through the atmosphere. Radiation is reflected from the top of the atmosphere Only half of the Earth's surface has radiation from the Sun incident on it at any one instant. The intensity of radiation (normal to the surface) is greater at the equator than at the poles. 	(1) (1) (1)		4
11(b)(ii)	 Use of A=4πι² Use of efficiency= useful power output total power input Use of I = P/A % of surface needed is 0.0005%, so claim is not valid [Accept reverse calculation to show power generated by cells over 0.5% of the Earth would generate 1.06 × 10⁵ GW] 	(1) (1) (1) (1)	Example of calculation: $A = \frac{P}{I} = \frac{100 \times 10^9 \text{ W}}{0.25 \times 164 \text{ W m}^{-2}} = 2.44 \times 10^9 \text{m}^2$ $A = 4\pi \times (6.4 \times 10^6 \text{ m})^2 = 5.15 \times 10^{14} \text{m}^2$ % needed = $\frac{2.44 \times 10^9 \text{m}^2}{5.15 \times 10^{14} \text{ m}^2} \times 100\% = 0.00047 \%$	4

11(c)(i)	 Satellite would always be above the same point on the Earth's surface So that contact/communication with the space station would be maintained at all times 	(1) (1)		2
11(c)(ii)	Use of $F = \frac{GMm}{r^2}$ with $F = m\omega^2 r$ Use of $\omega = 2\pi/T$ $r = 4.23 \times 10^7$ m $h = 3.6 \times 10^7$ m OR Use of $F = \frac{GMm}{r^2}$ with $F = \frac{mv^2}{r}$ Use of $v = 2\pi r/T$ $r = 4.23 \times 10^7$ m $h = 3.6 \times 10^7$ m	(1) (1) (1) (1) (1) (1) (1) (1)	Example of calculation: $m\omega^{2}r = \frac{GMm}{r^{2}}$ $\therefore \left(\frac{2\pi}{T}\right)^{2} = \frac{GM}{r^{3}}$ $\therefore r = \sqrt[3]{\frac{GMT^{2}}{4\pi^{2}}}$ $r = \sqrt[3]{\frac{6.67 \times 10^{11} \text{N m}^{2} \text{kg}^{2} \times 6.00 \times 10^{24} \text{kg} \times (8.64 \times 10^{4} \text{s})^{2}}{4\pi^{2}}}$ $r = 4.23 \times 10^{7} \text{m}$ $h = r - R_{E} = 4.23 \times 10^{7} \text{m} - 6.4 \times 10^{6} \text{m} = 3.59 \times 10^{7} \text{m}$	4

(Total for Question 11 = 18 marks)